



F[Hz]	125	250	500	1000	2000	4000	α_w	NRC
α_p	0,15	0,35	0,55	0,90	1,15	1,05	0,60	0,75

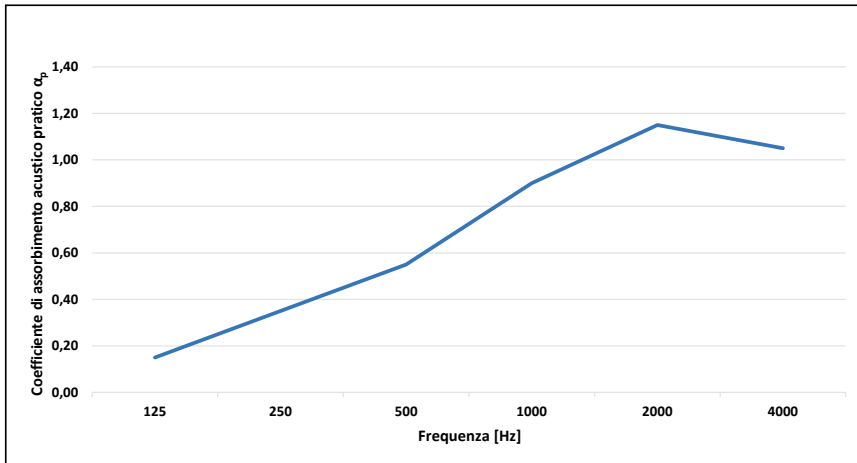


IS 29.3 Sabines (m²)

F[Hz]	125	250	500	1000	2000	4000	α_w	NRC
α_p	0,15	0,30	0,60	1,05	1,35	1,30	0,60	0,85

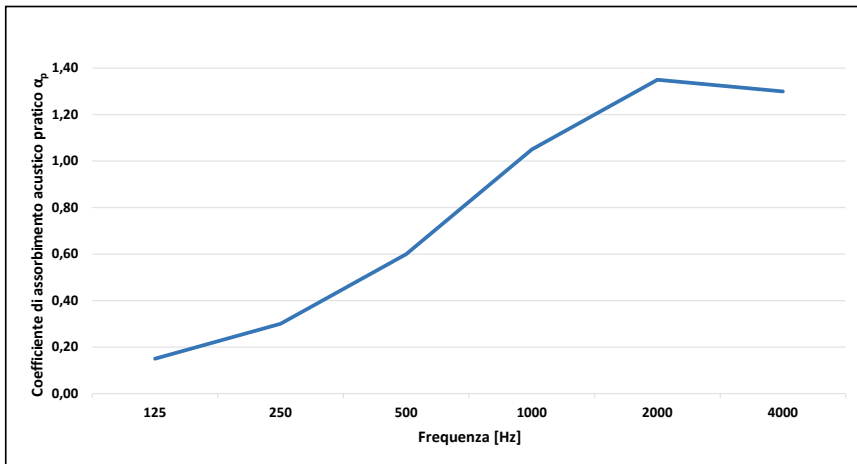

IS 13.3 Sabines (m²)

F[Hz]	125	250	500	1000	2000	4000	α_w	NRC
α_p	0,15	0,20	0,40	0,75	1,00	0,85	0,45	0,60

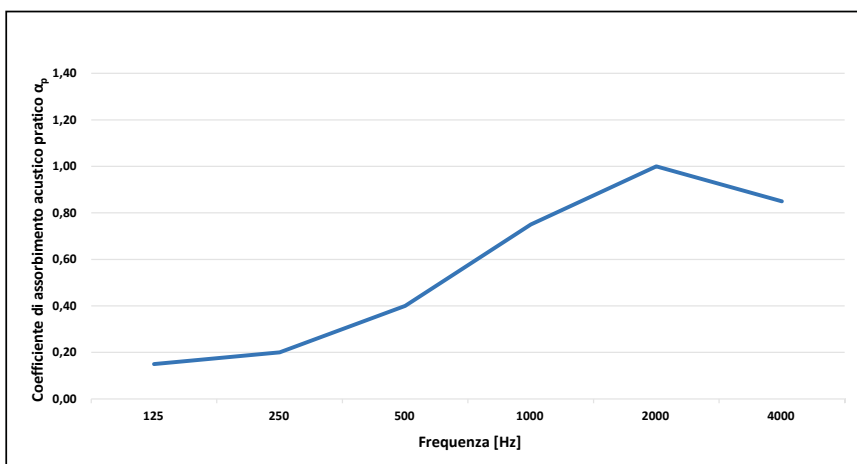

IS 3.10/16 Sabines (m²)

DISTANZA DAL SOLAIO 300 mm - FIBRA POLIESTERE 20 mm - SUSPENSION 300 mm - POLYESTER FIBER 20 mm